


Recommended tools:




Gloves



Soft sponge



Silicone float




Microfiber cloth




Detergent spray

1.

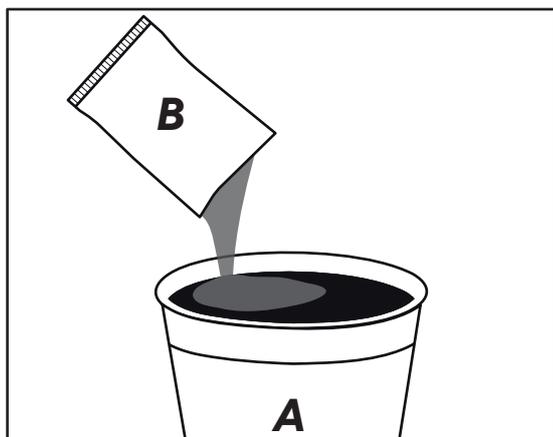


- Mix the grout according to the supplier's instructions (Litokol). Empty all of the contents of the catalyst (B) into the paste (A). Do not alter the ratio of the components to avoid any issues with the grout, and mix thoroughly.

2.

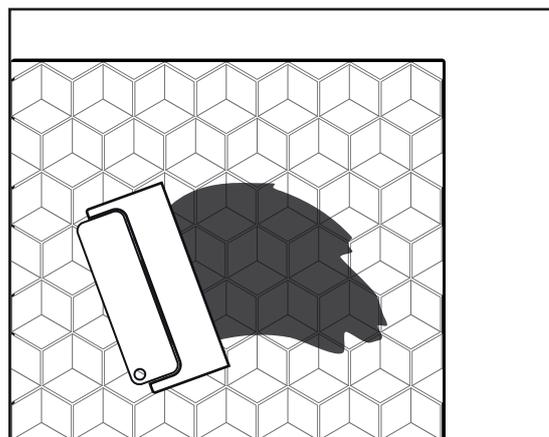


- Apply the grout using a soft silicone float. Before grouting try the product in an inconspicuous spot first. We will not accept complaints on laid material.

3.

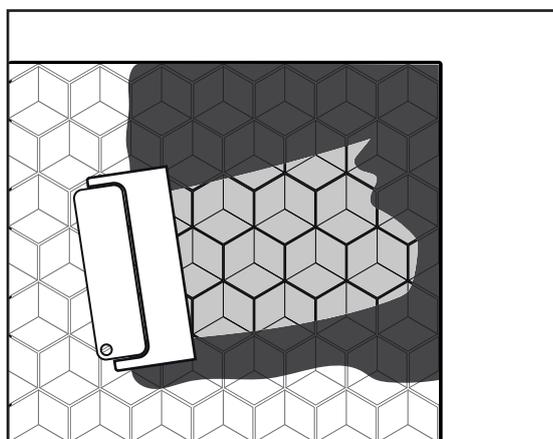


- Work in small sections, and remove the excess grout with the silicone float before moving on to the next area.

4.

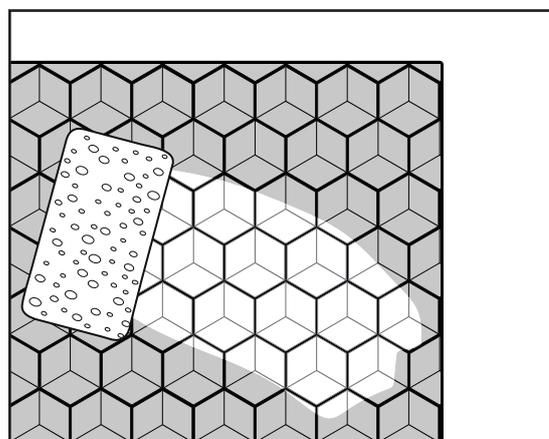


- Remove excess grout using a soft, damp sponge. Use only warm water. Rinse the sponge frequently and change the water often to achieve the best results. Replace the sponge when needed. There should be minimal grout left on the surface.

5.

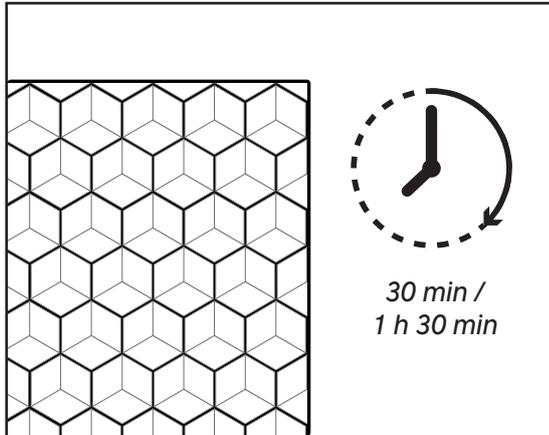


- Allow the grout to dry for at least 30 minutes to 1.5 hours, depending on environmental conditions (temperature for application: +12°C to +30°C; do not use in low temperatures or environments with high humidity).

6.

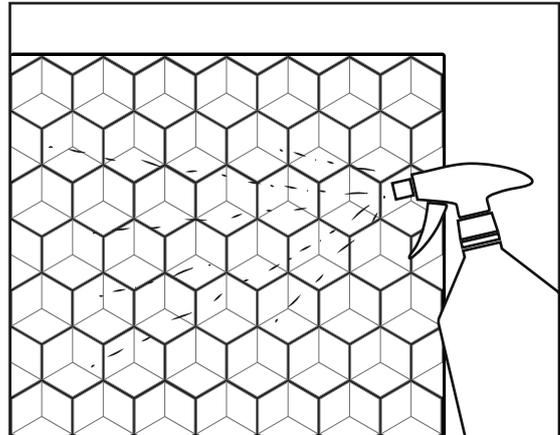


- To remove any remaining sticky residue, spray a generous amount of Litonet Gel Evo and foam it up with a soft sponge. Leave it on for 10 minutes. Do not allow the grout to harden during this process.

7.

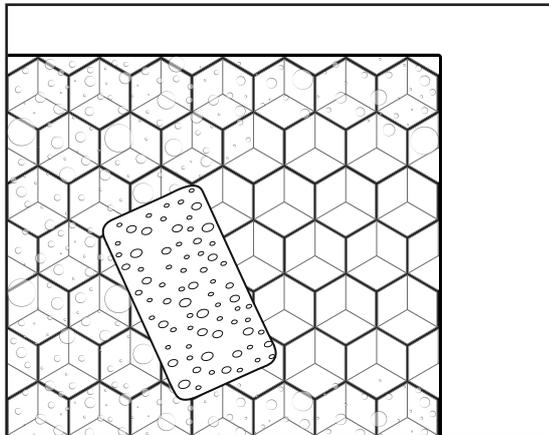

- Gently pat dry the surface with a paper towel or microfiber cloth, then clean with a damp, soft sponge. If the surface is still stained from the oil in the grout, repeat the steps 6 and 7 as many times as necessary.

8.

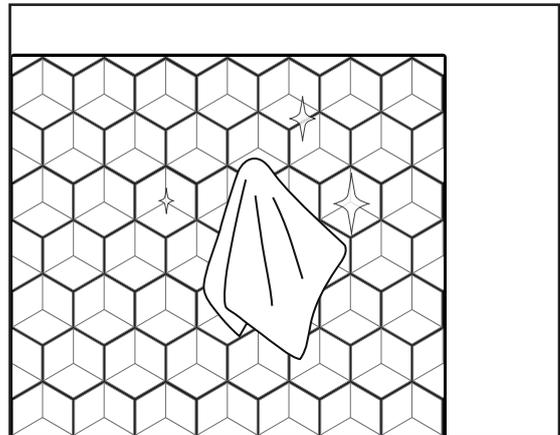

- Polish gently the surface with a microfiber cloth.

Disclaimer

This document provides general installation tips, precautions, and recommendations for our tiles and mosaics. It is not a step-by-step guide, but rather a resource to help ensure the proper handling and care of our products. We strongly recommend that all installations be carried out by a qualified professional to ensure proper application and long-term performance.

For any specific questions or situations not addressed here, please contact us.

Responsibility:

Botteganove SRL is not liable for any damage incurred during installation or grouting. Complaints regarding materials once installed will not be accepted. Color variations, surface irregularities, and shade differences are inherent to the handcrafted nature of our tiles and are not considered defects.